

Reliable / Secured / Sterile

Use for thermo-welding of plastic tubing



➤ Technical features

- Temperature of use: -5°C to 40°C
- Power supply by 110 - 240V socket (50-60 Hz)
- Humidity < 75 %
- 200 welding per blade
- No cross contamination risk
- Welding of tubing from Ø ext. 3/8" to Ø ext. 3/4"
- Welding possible on C-Flex® 072
- Translucent operator protective cover
- LCD screen (number of welding realized per blade)
- Aluminum case RAL9010 (Stainless steel in option)



➤ Components :

- One Sterile Tube Welder
- One power cord
- One multiuse heated blade
- One format dedicated pair of jaws
- One stainless steel mobile workstation with electrical height adjustment (in option)

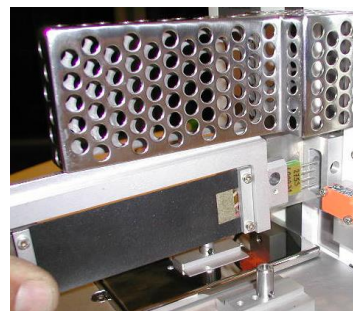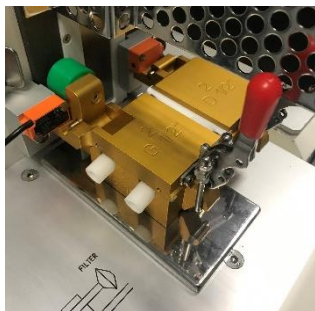

➤ Complementary devices

Aseptic tube sealer
↓



Workstation with height adjustment →



➤ Worldwide sales

- Design for different voltage and frequency
- Spare parts on stock
- Multilingual interface (FR/EN)
- Device integrated in FDA approved manufacturing process
- Specific robust packaging
- Preventive maintenance on site (quotation on request)

The current device is under sales exclusivity with Sanofi Pasteur group. All sales apart from the group must be expressly approved by Sanofi Pasteur.